



DIN Rail terminal blocks / DK..-TR-TG series

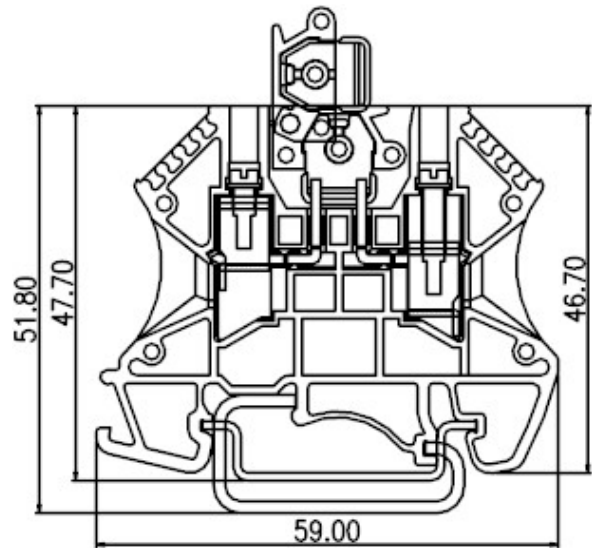

DK2.5-TG

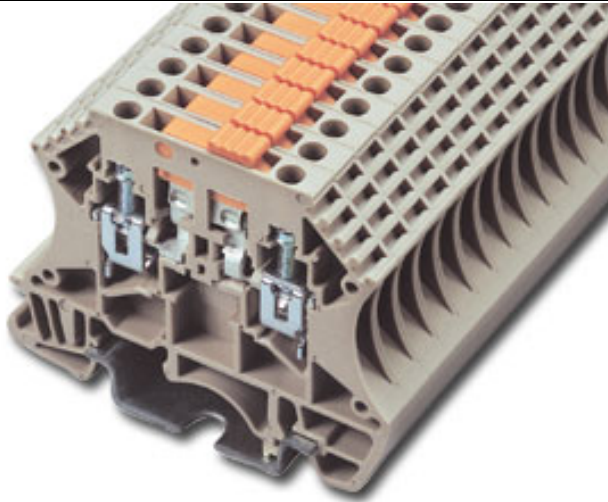

Approval		
Technical Data	UL	IEC
Rated voltage	300V	800V
Rated current	10A	16A
Conductor cross-section, solid (AWG / mm ²)	26~14 / 0.5~2.5	
Conductor cross-section, flexible (AWG / mm ²)	26~14 / 0.5~2.5	
Rated impulse withstand voltage	6KV	
Torque (N-m)	0.8	
Screw	M3	
Wire strip length	9~10mm	
Insulating material	PA	
TxHxW (mm)	5.1 x 46.7 x 59	
Optional color	Cat. No.	



	Accessories	Cat. No.
End cover		DK2.5C-TG
Partition		DKSPS-002
Small partition		
Insertion bridge	2 way	
	3 way	
	4 way	
	10 way	
Insertion bridge	2 way	CSC-2.502
	3 way	CSC-2.503
	4 way	CSC-2.504
	10 way	CSC-2.510
Screw-on bridge	2 way	
	3 way	
	4 way	
	10 way	
Marking label		TM26
Mounting Rail		TS-35 / TS-32
Tool		0.5 x 3mm